FR 7100.SCC.US

SLIDE TYPE:	**Full-Extension Drawer Slide - Progressive-Action**
MOUNTING:	Bottom Mount

WIDTH:	**24 mm (0.95 in.)**
LOAD CAPACITY:	dynamic up to **125 kg (275 lbs.)** (full-ext.) dynamic up to **105 kg (231 lbs.)** (over-ext.)

OPTION:

- also available with mounting tabs

MATERIAL:	stainless steel

FEATURES:	solid Delrin* rollers Delrin* encased steel roller bearings

SPECIFICATIONS:

- special narrow drawer profile for standard serving pans
- cabinet profile bottom-mount without screw holes for welding
- high lateral stability through specially formed middle profile and guide rollers
- ideal running characteristic and smoothness of running through integrated progressive-action
- lift out prevention clip mounted in middle profile
- double-sided captive profile
- self-closing
- operating temperature range -20° C to +80° C (-4° F to 176° F)

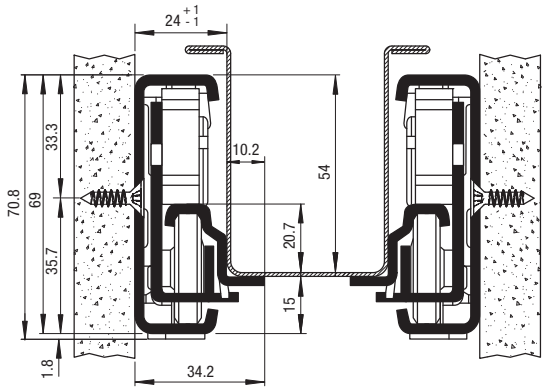

OPTIONS:

- on request, FR7100.SCC.US is also available with 60 mm (2.36 in.) over-extension
- on request, also available in a heat resistant version for up to 110° C (230° F) – load capacity 90 kg (full-ext.), 80 kg (over-ext.)

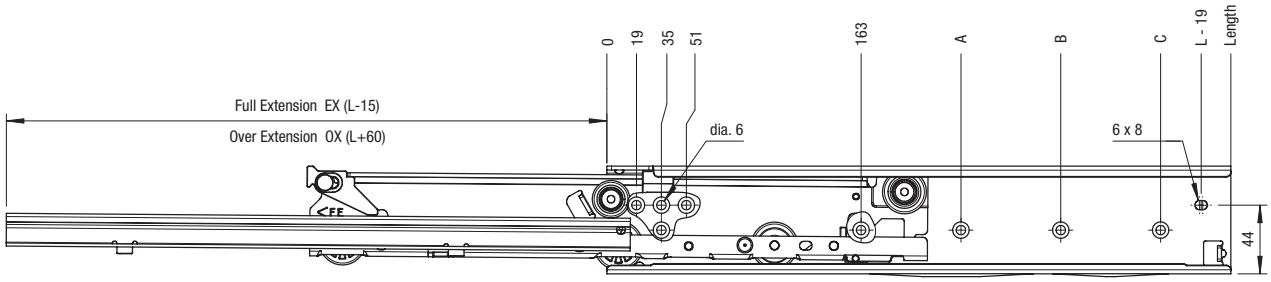

Length L mm	Length L in	EX full-extension mm	EX full-extension in	OX over-extension mm	OX over-extension in	A mm	A in	B mm	B in	C mm	C in	Weight kg	Weight lbs	Order No. full-extension	Order No. over-extension
400	*15.75*	385	*15.16*	460	*18.11*	323	*12.72*					*		**83146**	*
450	*17.72*	435	*17.13*	510	*20.08*	355	*13.98*					*		*	*
500	*19.69*	485	*19.09*	560	*22.05*	291	*11.46*	451	*17.76*			*		*	*
550	*21.65*	535	*21.06*	610	*24.02*	323	*12.72*	483	*19.02*			*		**82186T**	*
600	*23.62*	585	*23.03*	660	*25.98*	355	*13.98*	547	*21.54*			*		**82187T**	*
650	*25.59*	635	*25.00*	710	*27.95*	355	*13.98*	611	*24.06*			*		**82188T**	*
700	*27.56*	685	*26.97*	760	*29.92*	355	*13.98*	515	*20.28*	643	*25.31*	*		*	*
750	*29.53*	735	*28.94*	810	*31.89*	355	*13.98*	547	*21.54*	675	*26.57*	*		*	*

Packing Unit: **400-600 mm: 4 sets per box, 650-750 mm: 2 sets per box** — *** on request**

*DuPont (TM) Delrin®

Fulterer