

# FR 5608

<b>SLIDE TYPE:</b>	Heavy-Duty Full-Extension Ball Bearing Drawer Slide
<b>MOUNTING:</b>	Side Mount

<b>WIDTH:</b>	17.8 mm (0.70 in.)
<b>LOAD CAPACITY:</b>	dynamic up to 100 kg (225 lbs.)

**New Product**  
Please inquire for lead time




FR 5608 includes a metal disconnect latch


<b>MATERIALS:</b>	cold rolled steel
-------------------	-------------------

<b>FEATURES:</b>	steel ball bearings
------------------	---------------------

<b>SPECIFICATIONS:</b>
<ul style="list-style-type: none"> <li>▶ precision ball bearing drawer slide for heavy-duty usage</li> <li>▶ telescoping 3-stage design with excellent running qualities</li> <li>▶ lengths 400-700 mm have standard 25 mm overtravel</li> <li>▶ drawer slide is non-handed and has a hold close detent</li> <li>▶ lengths 800, 900, 1000 and 1100 mm have no overtravel</li> <li>▶ recommended screws: wood screw #8 or machine screws 8-32. See screws page.</li> <li>▶ metal disconnect latch standard</li> </ul>

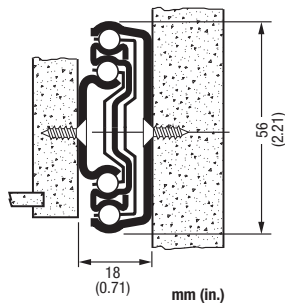

17.8 mm (0.70 in.) is the actual size of the slide. Allow a min. of 17.9 mm (0.71 in.) for clearance and a maximum of 18.3mm (0.72 in.).

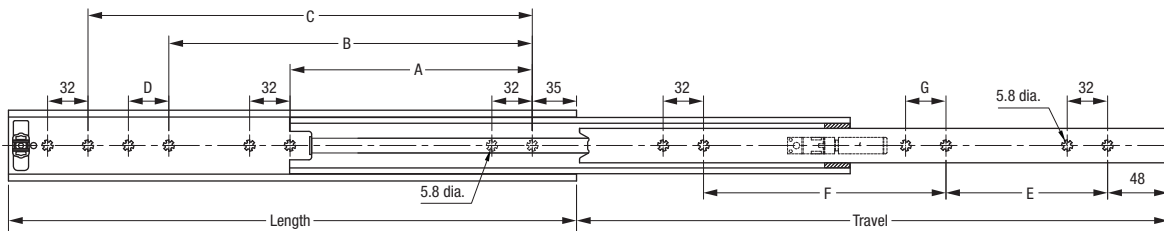

Length	Travel	Cabinet Profile:				Drawer Profile:			kg.	lbs.	Weight	Order No.					
		A	B	C	D	E	F	G									
mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in				
400	15.75	425	16.73	224	8.82	320	12.60			128	5.04	128	5.04	*	*		
450	17.72	475	18.70	224	8.82	352	13.86			160	6.30	160	6.30	*	*		
500	19.69	525	20.69	224	8.82	384	15.12	32	1.26	192	7.56	160	6.30	*	*		
550	21.65	575	22.64	224	8.82	448	17.64	32	1.26	224	8.82	192	7.56	*	*		
600	23.62	625	24.61	224	8.82	480	15.90	32	1.26	224	8.82	224	8.82	32	1.26	*	*
650	25.59	675	26.58	224	8.82	352	13.86	544	21.42	256	10.08	256	10.08	32	1.26	*	*
700	27.56	725	28.54	224	8.82	352	13.86	576	22.68	256	10.08	288	11.34	32	1.26	*	*
800	31.50	800	31.50	224	8.82	448	17.64	672	26.46	288	11.34	352	13.86			*	*
900	35.43	900	35.43	224	8.82	480	18.90	768	30.24	320	12.600	416	16.38	32	1.26	*	*
1000	39.37	1000	39.37	224	8.82	544	21.42	832	32.76	384	15.12	480	18.90	32	1.26	*	*
1100	43.31	1100	43.31	224	8.82	576	22.68	960	37.80	416	16.38	544	21.42	32	1.26	*	*

Packing Unit: 400mm-450mm 8 pair per box, 500mm-600mm 6 pair per box, 650mm-1100mm 4 pair per box

\* on request